Datasheet


Bicycle stands Pireo Display 5 seats Product code 308-D

Rev. 0 of 10/06/2016







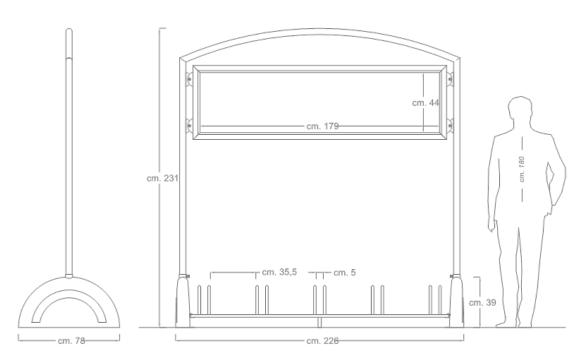

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Bicycle stands Pireo Display 5 seats Product code 308-D

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

5-seater Pireo bike rack with display composed of 2 supports in white stone-effect concrete: each individual support is equipped with a compass in galvanized steel round tube Ø mm. 55x2 inside which allows the insertion and locking of the table-holder frame. No. 2 horizontal connecting crosspieces in galvanized steel rectangular tube 50x20x1.5 mm complete with support feet. No. 5 arch-shaped bike-holder brackets in galvanized steel tube with oval section 40x20x1.5 mm.

- Double-sided table composed of table-holder frame and upper arch in galvanized steel round tube Ø mm. 48x2; the frame is equipped with No. 4 plates for connecting the table. Perimeter frame made of galvanized steel box thickness mm. 1.2.
- 1.2 mm thick galvanized sheet metal billboard panel applied inside the boxed profile; 4 galvanized sheet metal connection plates welded on the short sides of the perimeter frame.

Total weight: 160Kg

Ω

Rev. 0 of 10/06/2016



FINISH ACCORDING TO THE CATALOGUE



Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 308-D-AD -

PRODUCT VARIANTS



Product code 308 - Bicycle Stands Pireo 5 seats



Product code 308-BIS - Bicycle Stands Pireo 9 seats



Product code 308-BIS-D - Bicycle Stands Pireo Display 9 seats

4/5

Datasheet

Bicycle stands Pireo Display 5 seats Product code 308-D

Rev. 0 of 10/06/2016



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Bicycle stands Pireo Display 5 seats Product code 308-D

Rev. 0 of 10/06/2016



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018

Ŋ