

Datasheet


Plomb

Product code D879

Rev. 0 of 24/03/2023



2/5

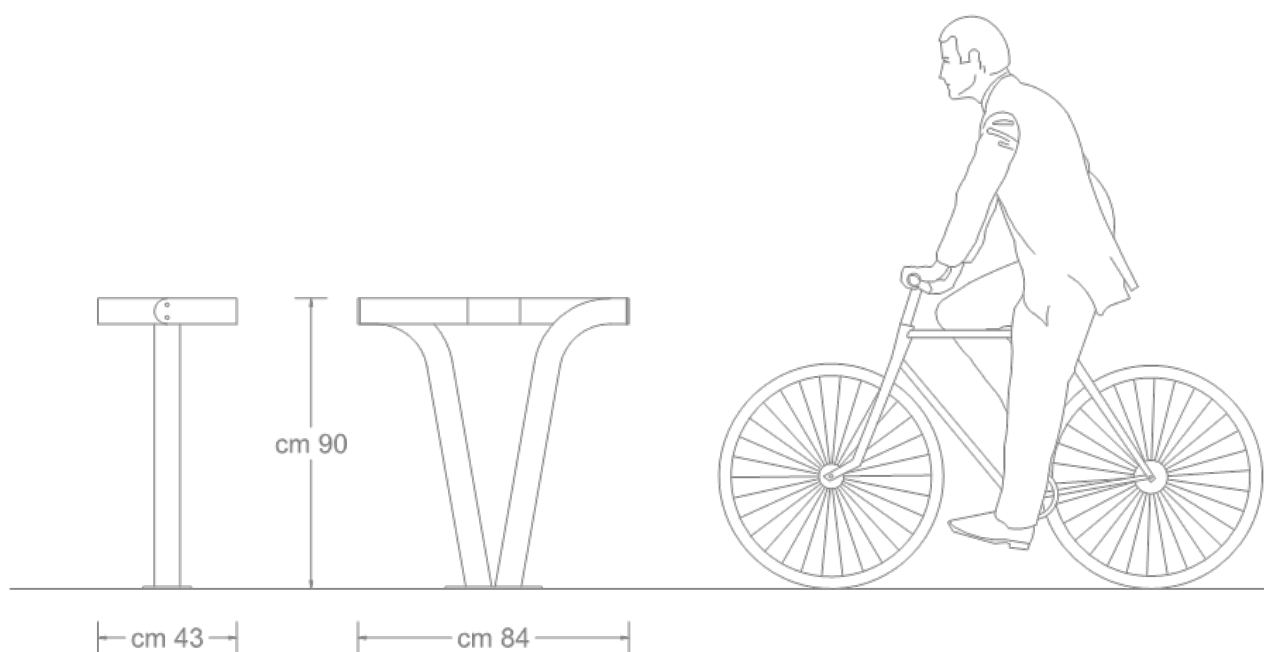

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Plomb

Product code D879

Rev. 0 of 24/03/2023



DESCRIPTION

Structure

With its particular shape, the Plomb bike rack is made up of two shaped profiles, made of round galvanized steel tube Ø mm 60x2; the profiles are made integral with the base by a shaped plate, made of galvanized sheet metal thickness mm. 6 with laser cutting, and provided with holes for fixing to the ground.

- Shaped upper bracket, made of galvanized profile mm. 80x6, fixed to the round profiles with bolts.
- The shaped support is designed to be used on both sides, securing the bicycle to the support by means of a padlock.

Total weight: 18Kg

Datasheet

Plomb

Product code D879

Rev. 0 of 24/03/2023



FINISH ACCORDING TO THE CATALOGUE



RAL 1018
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

DELIVERY

Prodotto fornito già assemblato con viteria in acciaio ed istruzioni per il fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018