


Datasheet

Borad PopUp floor standing double sided cm100x140h

Product code G539

Rev. 0 of 14/11/2018

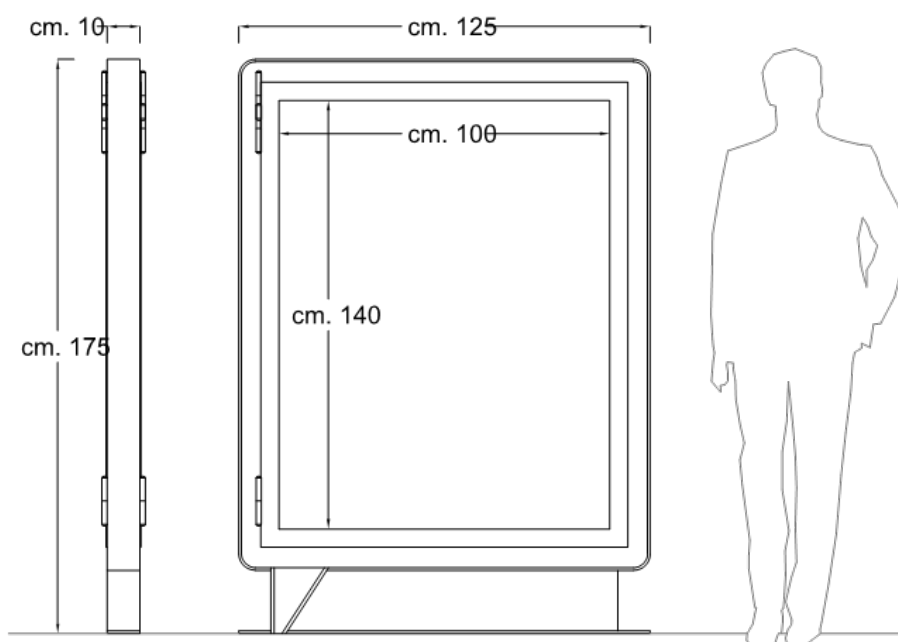

1/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Borad PopUp floor standing double sided cm100x140h

Product code G539

Rev. 0 of 14/11/2018



DESCRIPTION

Structure

With a particular shape, consisting of a perimeter frame in 100x8 mm galvanized flat iron with rounded corners and a base profile made with an IPE beam characterized by a decorative "comma" positioned at the base (front and back). Noticeboard frame (double-sided) made of 2 mm thick galvanized steel box with a central dividing panel; No. 2 book-opening doors made of 1.5 mm thick galvanized steel profiles and universal key lock. Reading front made of 4 mm thick transparent compact polycarbonate, shatterproof, protected from UV rays and particularly suitable for outdoor use.

- Noticeboard internal lighting system consisting of No. 2 horizontally arranged lighting fixtures (upper and lower part); automatic power cut-off system when the doors are opened, wiring with standard cables and power cable with exit at the base (floor level) for subsequent connection to the public network; posting using magnets.
- The notice board is equipped with holes at the base for anchoring to the ground using threaded brackets anchored to the concrete foundation.

Datasheet

Borad PopUp floor standing double sided cm100x140h

Product code G539

Rev. 0 of 14/11/2018



FINISH ACCORDING TO THE CATALOGUE



RAL 1018
(Perimeter frame)



RAL 7016
(Bulletin board frame, doors and perimeter frame)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code G539-DIM - Installation template for double-sided ground PopUp totem cm. 100x140H.

PRODUCT VARIANTS



Product code G541-BIS - PopUp display open case 200x140



Product code G541 - PopUp display case cm140x200h

Datasheet

Borad PopUp floor standing double sided cm100x140h

Product code G539

Rev. 0 of 14/11/2018



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Borad PopUp floor standing double sided cm100x140h

Product code G539

Rev. 0 of 14/11/2018



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The structure must be installed by means of cement foundation and anchoring with anchor bolts. The positioning of the anchor bolts is carried out with the help of special jig (not supplied, can be requested as an accessory item). Please note, the type of foundation to be built should be evaluated by local qualified technician, depending on the characteristics of the ground on which the carport will be installed.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018

5/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles