




Datasheet

Teulada seat of cm. 150
Product code 1137-P-150

Rev. 0 of 10/06/2016

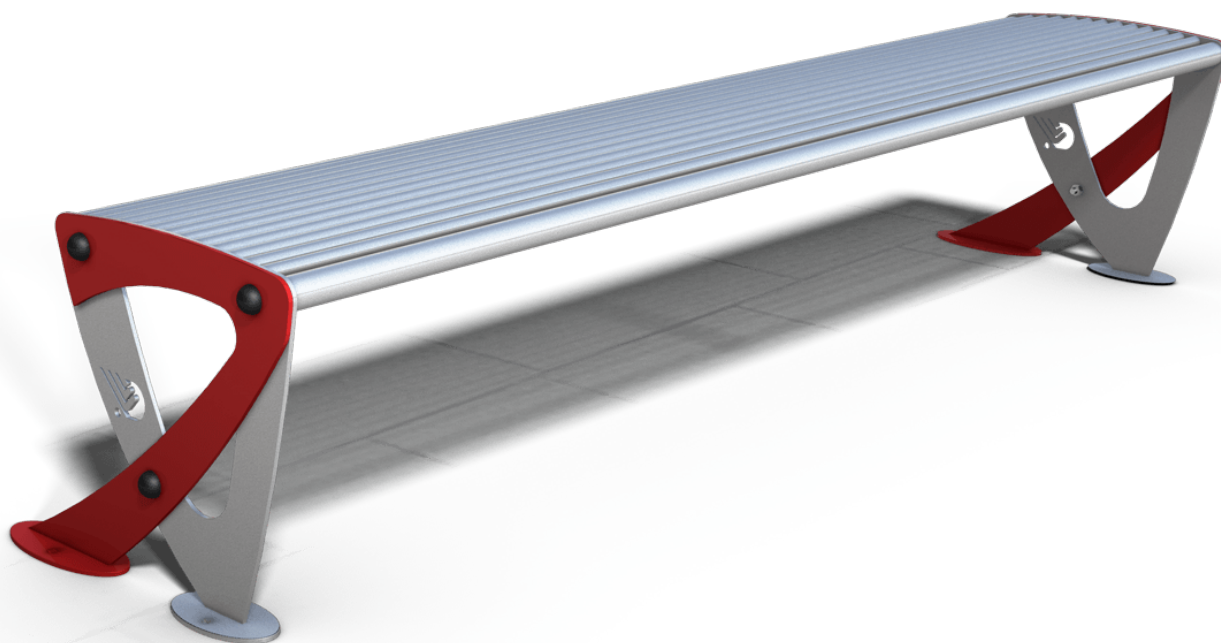

1/5

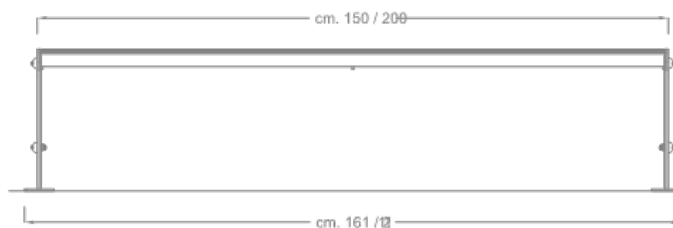

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Teulada seat of cm. 150
Product code 1137-P-150

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Teulada bench composed of N. 2 supports with a stylised shape obtained from high definition laser cutting, consisting of a double shape in galvanised sheet metal, thickness mm. 6 with decorative carving on the internal shape. Each single support is provided with plates at the base in galvanised sheet metal.

- Seat shell made with N. 12 profiles in galvanised steel round tube Ø mm. 20x1.5 and N. 2 profiles in galvanised steel round tube Ø mm. 40x1.5.
- The profiles on the seat are welded on special galvanised steel shapes.

Overall weight: 34Kg

Datasheet

Teulada seat of cm. 150
Product code 1137-P-150


Rev. 0 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Brilliant aluminum
(Internal templates and body)



RAL 3003
(External shapes)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 1137-150 - Teulada bench of cm. 150



Product code 1137-200 - Teulada bench of cm. 200



Product code 1137-I - Teulada inclusion bench of cm.200



Product code 1137-P-200 - Teulada seat of cm. 200

3/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Teulada seat of cm. 150
Product code 1137-P-150

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Teulada seat of cm. 150
Product code 1137-P-150

Rev. 0 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.


Processing center

Certificate of Processing Center



Datasheet

Teulada seat of cm. 200
Product code 1137-P-200

Rev. 0 of 10/06/2016

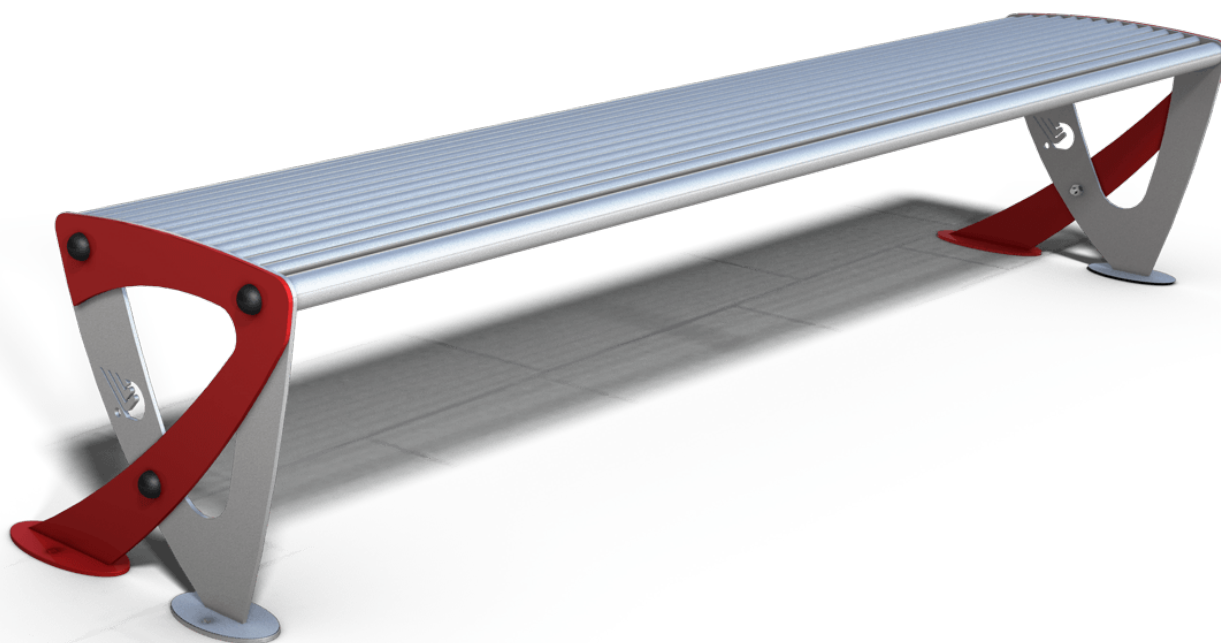

1/5

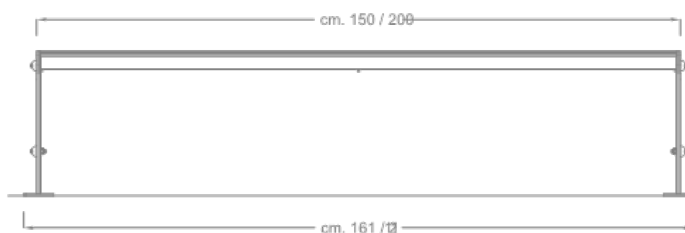

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Teulada seat of cm. 200
Product code 1137-P-200

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Teulada bench composed of N. 2 supports with a stylised shape obtained from high definition laser cutting, consisting of a double shape in galvanised sheet metal, thickness mm. 6 with decorative carving on the internal shape. Each single support is provided with plates at the base in galvanised sheet metal.

- Seat shell made with N. 12 profiles in galvanised steel round tube Ø mm. 20x1.5 and N. 2 profiles in galvanised steel round tube Ø mm. 40x1.5.
- The profiles on the seat are welded on special galvanised steel shapes.

Overall weight: 39Kg

Datasheet

Teulada seat of cm. 200
Product code 1137-P-200


Rev. 0 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Brilliant aluminum
(Internal templates and body)



RAL 3003
(External shapes)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 1137-150 - Teulada bench of cm. 150



Product code 1137-200 - Teulada bench of cm. 200



Product code 1137-I - Teulada inclusion bench of cm.200



Product code 1137-P-150 - Teulada seat of cm. 150

3/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Teulada seat of cm. 200
Product code 1137-P-200

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Teulada seat of cm. 200
Product code 1137-P-200

Rev. 0 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center