

Datasheet


Simply outdoor bench with polystone sitting

Product code D877

Rev. 0 of 22/03/2022



1/5

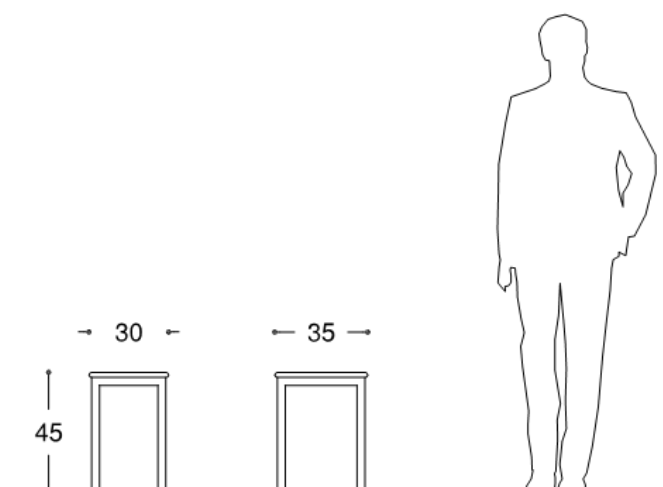

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Simply outdoor bench with polystone sitting

Product code D877

Rev. 0 of 22/03/2022



DESCRIPTION

Structure

Benches made of galvanized steel. Frame made of galvanized steel tubing with a square section of mm. 30x30x1.5, designed for simple support on the floor. Seat made of plastic material (Polystone®).

- The bench can be integrated upon request with a relative Table (Simply model code D876).

Overall weight: 33Kg

Datasheet

Simply outdoor bench with polystone sitting

Product code D877

Rev. 0 of 22/03/2022



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 2000
(Polystone)



RAL 9010
(Supports)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code D877-L - Simply outdoor bench with sheet metal seat

Datasheet

Simply outdoor bench with polystone sitting

Product code D877

Rev. 0 of 22/03/2022



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Simply outdoor bench with polystone sitting

Product code D877

Rev. 0 of 22/03/2022



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product does not require anchoring to the ground.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center