


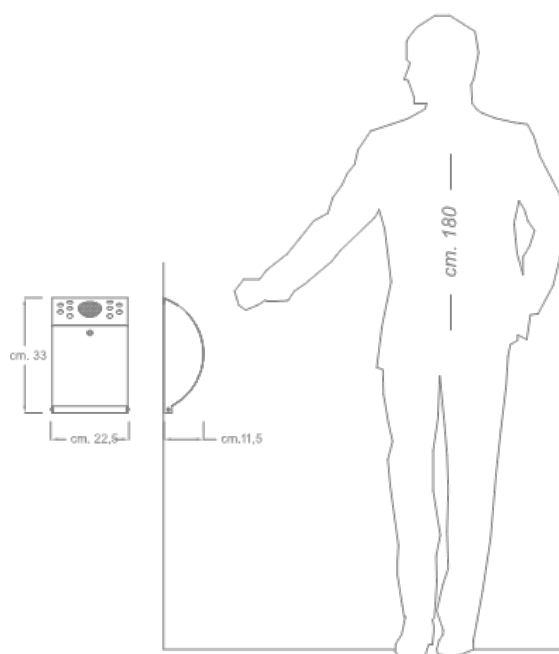

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DESCRIPTION

Structure

Smokers ashtray made of a box made of 1 mm thick galvanized sheet metal, designed for wall mounting using holes located on the rear face. Upper front panel, made of 1 mm thick galvanized sheet metal with a Ø 70 mm central hole equipped with a micro-perforated internal sheet metal for extinguishing cigarette butts; and 14 mm Ø circular holes positioned in a checkerboard pattern on the sides to allow the insertion of extinguished cigarette butts. Internal container in 1 mm thick galvanized sheet metal with a shaped front panel that gives the entire structure a soft and modern line. In order to allow the extraction of cigarette butts by falling without ever coming into direct contact with them; the container is hinged to the structure and is equipped with a single key lock.

- Circular pictogram indicating "ASHTRAY" located on the front of the container.

Overall weight: 3Kg

FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(External shell)



Brilliant aluminum
(Inner container)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 374 - Wall-attached Fumy ashtray

TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

DELIVERY

Prodotto fornito già assemblato con viteria in acciaio ed istruzioni per il fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio a muro mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018