

Datasheet


Snake large trash bin with lid and ashtray

Product code D827-BIS

Rev. 0 of 31/08/2022



1/5

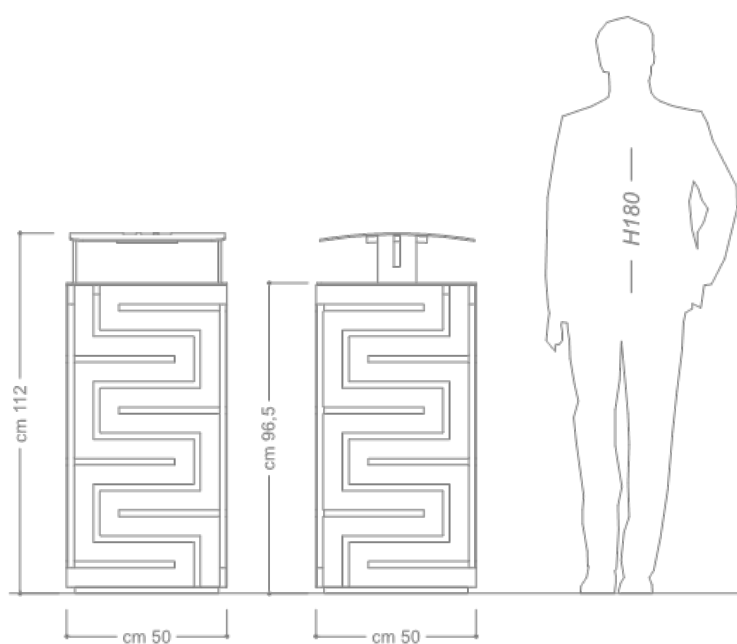

Datasheet

Snake large trash bin with lid and ashtray

Product code D827-BIS

Rev. 0 of 31/08/2022



DESCRIPTION

Structure

What distinguishes the Snake litter bin is the sinuous shape, characteristic of the snake. Square-shaped litter bin barrel, made of shaped panels of galvanized sheet metal, equipped with a lid and upper ring with a small hole for inserting waste, obtained by laser cutting and made of 3 mm thick galvanized sheet metal, complete with hinge for opening and extracting the internal container. Upper ashtray, incorporated into the lid complete with stainless steel plate for extinguishing cigarette butts. The barrel is characterized by stylised decorative shapes, obtained by laser cutting and made of 2 mm thick galvanized sheet metal. The litter bin is equipped with holes at the base for fixing to the ground.

Overall weight: 53Kg

Datasheet

Snake large trash bin with lid and ashtray

Product code D827-BIS

Rev. 0 of 31/08/2022



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1015
(Basket, ring abd lid)



RAL 8012
(Decorative panels)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code D827 - Snake large trash bin](#)

Datasheet

Snake large trash bin with lid and ashtray

Product code D827-BIS

Rev. 0 of 31/08/2022



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Datasheet

Snake large trash bin with lid and ashtray

Product code D827-BIS

Rev. 0 of 31/08/2022



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center