

Datasheet
Star tree grid

Product code G527

Rev. 0 of 20/09/2021

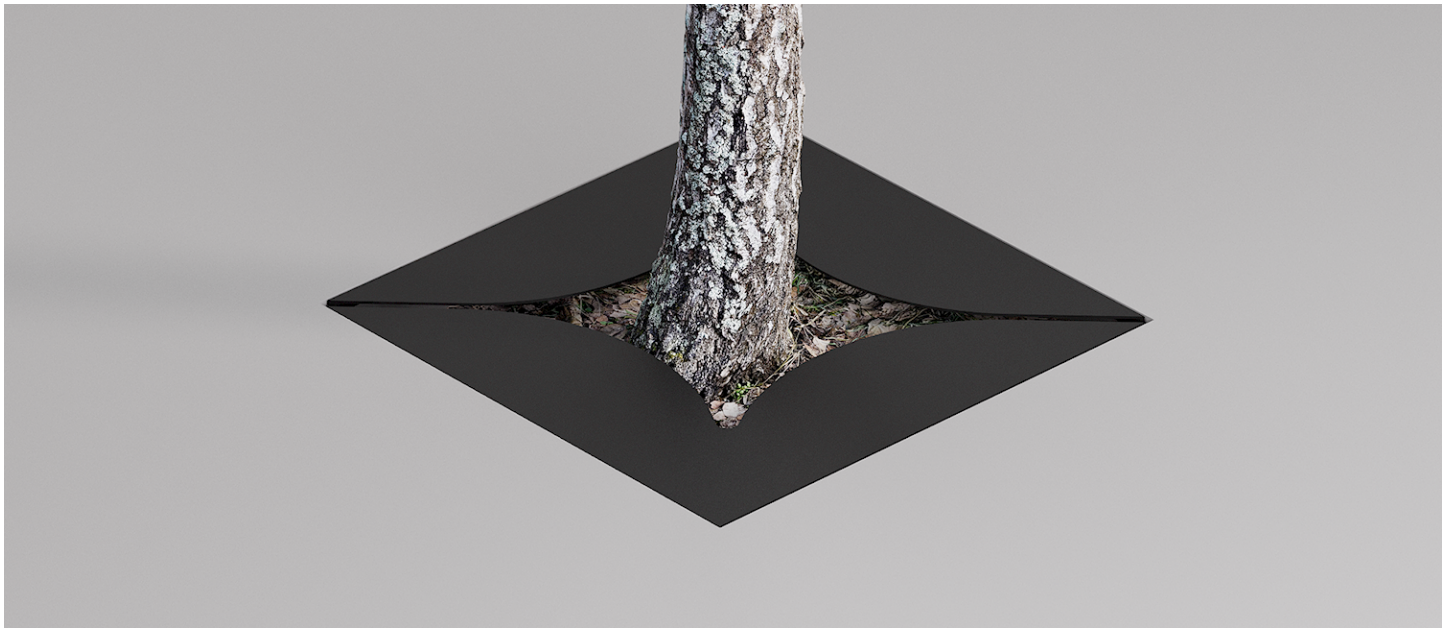

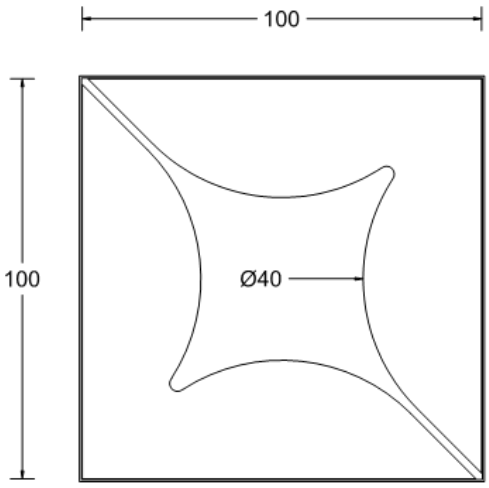

+39 0833 95 50 13
WWW.DIMCAR.IT **INFO@DIMCAR.IT**
VIA TAURISANO 101, Z.A.
73059 UGENTO (LE) ITALY
P.I. C.F. 031129830752
REA LE 200574 CAP SOC. SOC. € 2.000.000.00

DESCRIPTION

Structure

Star model grille, characterized by stylized panels made of 6 mm thick galvanized sheet metal, obtained by laser cutting. The grille is composed of a frame in galvanized steel angular profile, equipped with brackets for fixing to the ground.

Total weight: 44Kg

+39 0833 95 50 13
WWW.DIMCAR.IT **INFO@DIMCAR.IT**
VIA TAURISANO 101, Z.A.
73059 UGENTO (LE) ITALY
P.I. C.F. 031129830752
REA LE 200574 CAP SOC. SOC. € 2.000.000.00

Datasheet
Star tree grid

Product code G527

Rev. 0 of 20/09/2021

FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(Structure)

Customers can request a different finish from the RAL color options available on our website.

+39 0833 95 50 13
WWW.DIMCAR.IT **INFO@DIMCAR.IT**
VIA TAURISANO 101, Z.A.
73059 UGENTO (LE) ITALY
P.I. C.F. 031129830752
REA LE 200574 CAP SOC. SOC. € 2.000.000.00

TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

+39 0833 95 50 13
WWW.DIMCAR.IT **INFO@DIMCAR.IT**
VIA TAURISANO 101, Z.A.
73059 UGENTO (LE) ITALY
P.I. C.F. 031129830752
REA LE 200574 CAP SOC. SOC. € 2.000.000.00

DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018

+39 0833 95 50 13
WWW.DIMCAR.IT **INFO@DIMCAR.IT**
VIA TAURISANO 101, Z.A.
73059 UGENTO (LE) ITALY
P.I. C.F. 031129830752
REA LE 200574 CAP SOC. SOC. € 2.000.000.00