


Datasheet

Tablet Santiago for fixed descriptions

Product code 176

Rev. 0 of 10/06/2016

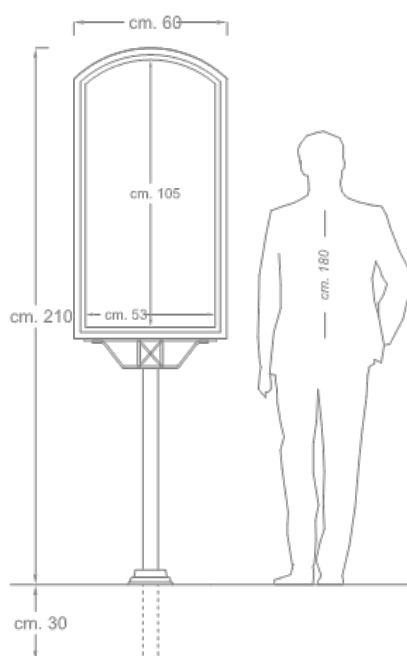

Datasheet

Tablet Santiago for fixed descriptions

Product code 176

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Santiago table made of 1.5 mm thick galvanized steel box with an arched band on the upper part. Reading side made of transparent unbreakable compact polycarbonate, protected from UV rays and particularly suitable for outdoor use, thickness 3 mm.

- Support upright in galvanized steel round tube Ø 60x2 mm; arm with galvanized decorative elements to support the table. Decorative flange to cover the hole made for burial.

Total weight: 28Kg

Datasheet

Tablet Santiago for fixed descriptions

Product code 176

Rev. 0 of 10/06/2016



FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 176-PL -

PRODUCT VARIANTS



Product code 176-BIS - Santiago Tablet for interchangeable descriptions

Datasheet

Tablet Santiago for fixed descriptions

Product code 176

Rev. 0 of 10/06/2016



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Tablet Santiago for fixeddescriptions

Product code 176

Rev. 0 of 10/06/2016



DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto deve essere installato mediante cementazione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018