
Rev. 0 of 10/06/2016







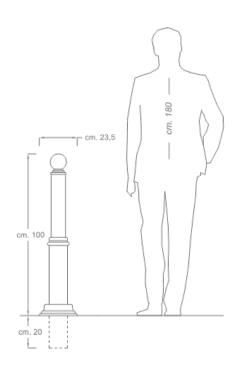

Dimost reserves the right to make at any time changes on the products deemed useful to improve the quality of the same; the impage contained in the sheets may not faithfully reproduce the real colors of the items.

/2

# Datasheet

Teseo Bollard Product code 195

Rev. 0 of 10/06/2016



**DESCRIPTION** 

#### Structure

Column made of round tube of galvanized steel Ø mm. 114x3 (lower part) and Ø mm. 89x2 (upper part), with decorative intermediate element in turned steel. The column, in the upper part is adorned with a frieze. Decorative flange to cover the hole made for the burial.

Total weight: 11Kg

2/2

Rev. 0 of 10/06/2016



#### **COLOR FINISH AS PROVIDED IN THE CATALOG**



Customers can request a different finish from the RAL color options available on our website.

**PRODUCT OPTIONALS** 

Product code 195-AMOV - Removability system for Teseo bollard

**PRODUCT VARIANTS** 



Product code 195-BIS - Teseo Bollard with rings

imcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

#### 7,

## Datasheet

Teseo Bollard Product code 195

Rev. 0 of 10/06/2016



#### ANTICORROSIVE TREATMENTS AND FINISHES

#### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### **Anti-corrosive application**

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

#### **Anticorrosive polymerization**

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

## Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

## Datasheet

Teseo Bollard Product code 195

Rev. 0 of 10/06/2016



**DELIVERY** 

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

**FIXING** 

The product must be installed by cementing.

**CORPORATE CERTIFICATIONS** 

#### ISO 9001:2015

Quality management system.

#### UNI EN ISO 3834-3:2021

Welding quality management system.

### **Processing center**

Certificate of Processing Center