

Datasheet


Thin curved seat

Product code D814

Rev. 0 of 04/09/2019



1/5

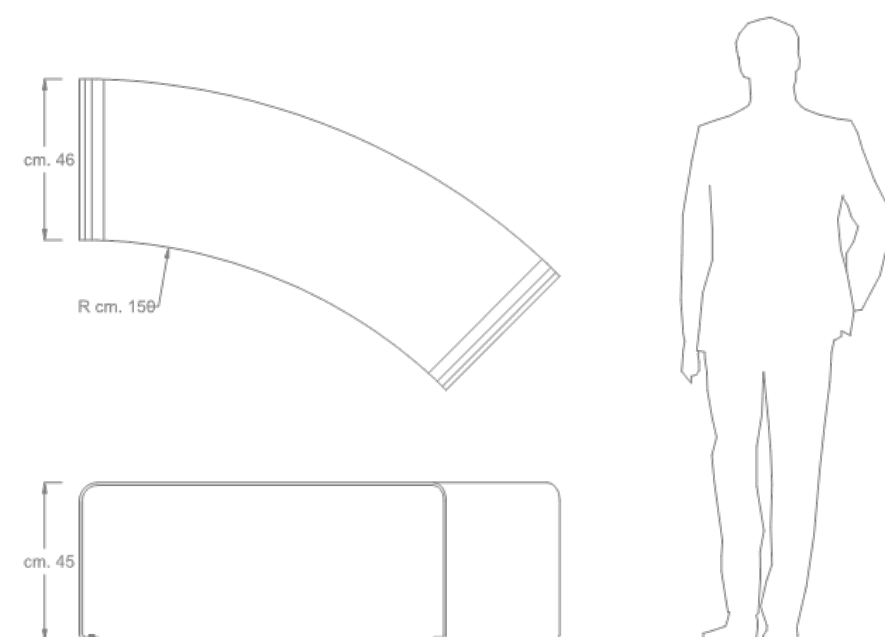

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Thin curved seat
Product code D814

Rev. 0 of 04/09/2019



DESCRIPTION

Structure

With its particular curved shape, the Thin curved bench is made of a press-bent panel with rounded corners, made of 8 mm thick galvanized sheet metal. The module is equipped with holes at the base for fixing to the ground. The Thin curved bench is designed for the installation of multiple modules, either side by side or in a random order, thanks to its clean and defined lines it fits well in modern urban environments.

Overall weight: 66Kg

Datasheet

Thin curved seat
Product code D814

Rev. 0 of 04/09/2019



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1018
(Steel components)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code D813 - Thin seat](#)

Datasheet

Thin curved seat
Product code D814

Rev. 0 of 04/09/2019



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Thin curved seat
Product code D814

Rev. 0 of 04/09/2019



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center