
Time table for model Modena stainless \emptyset cm. 6 or cm. 9 Product code 391

Rev. 1 of 13/01/2020







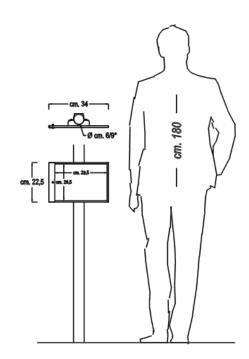

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Time table for model Modena stainless ø cm. 6 or cm. 9 Product code 391

Rev. 1 of 13/01/2020



DESCRIPTION

Structure

Modena single-sided stainless steel timetable table with a rectangular shape, made of polished AISI 304 stainless steel sheet, thickness mm. 8 with a lateral clip (with screw) for the safe locking of the information sheet; all the edges are rounded to eliminate sharp or cutting edges. The table is equipped in the upper part with a bracket composed of two halves (one of which is fixed to the body of the table) designed to internally house a circular section upright with a diameter of mm. 60 or mm. 90, or with a diameter on request*.

*the customer will be responsible for specifying the dimensions of the upright already in the estimate phase. N. 1 exhibition space equipped with a transparent compact polycarbonate panel for the insertion of timesheets (in horizontal A4 format); the panel is designed to protect the information and prevent accidental or unauthorized removal.

Overall weight: 1Kg

Time table for model Modena stainless \emptyset cm. 6 or cm. 9 Product code 391

Rev. 1 of 13/01/2020



COLOR FINISH AS PROVIDED IN THE CATALOG

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 391-BIS -

3/2

4/5

Datasheet

Time table for model Modena stainless ø cm. 6 or cm. 9 Product code 391

Rev. 1 of 13/01/2020



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Time table for model Modena stainless ø cm. 6 or cm. 9 Product code 391

Rev. 1 of 13/01/2020



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product has a slotted rear bracket for attachment to the existing pole.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center

2

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.