

# Datasheet


Bicycle Stands Pireo 5 seats

Product code 308

Rev. 0 of 10/06/2016



1/5

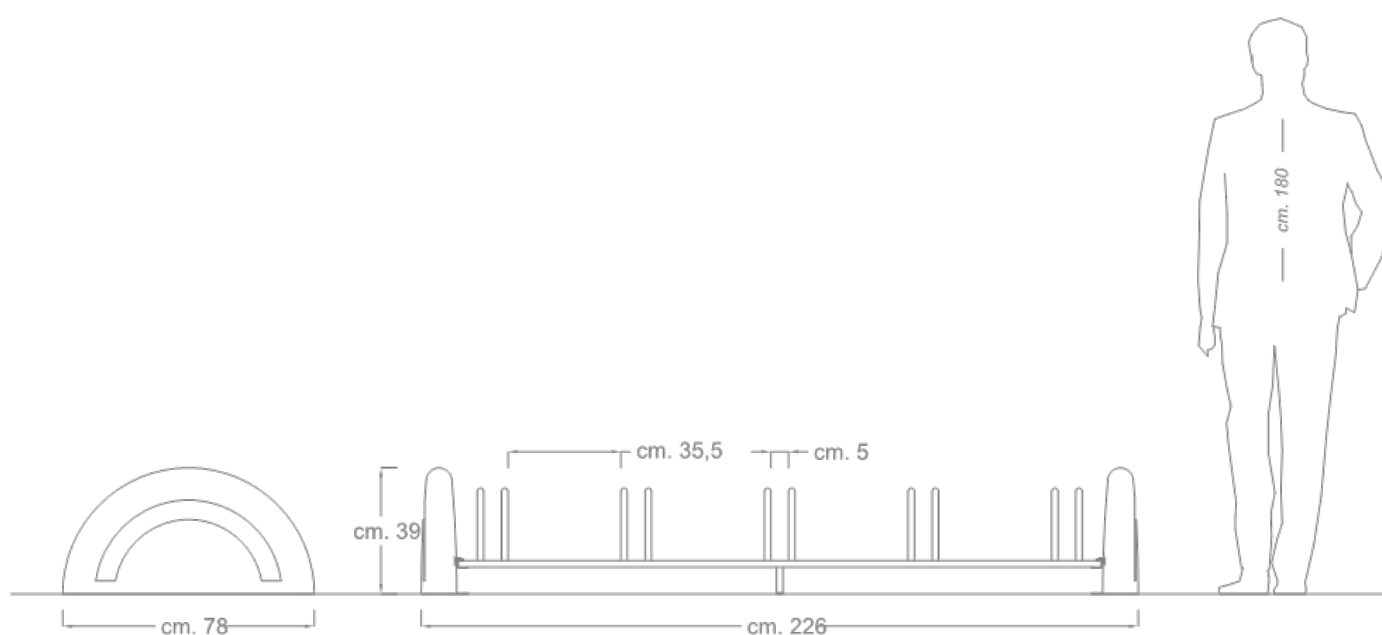

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.



# Datasheet

Bicycle Stands Pireo 5 seats

Product code 308

Rev. 0 of 10/06/2016



## DESCRIPTION

### Structure

5-seater Pireo bike rack consisting of 2 supports in white stone-effect concrete; 2 horizontal connecting crosspieces in rectangular galvanized steel tube measuring 50x20x1.5 mm complete with support feet. 5 arch-shaped bike-holding brackets in oval-section galvanized steel tube measuring 40x20x1.5 mm.

**Total weight:** 143Kg



# Datasheet

Bicycle Stands Pireo 5 seats

Product code 308

Rev. 0 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

## PRODUCT VARIANTS



Product code 308-D - Bicycle stands Pireo Display 5 seats



Product code 308-BIS - Bicycle Stands Pireo 9 seats



Product code 308-BIS-D - Bicycle Stands Pireo Display 9 seats



# Datasheet

Bicycle Stands Pireo 5 seats

Product code 308

Rev. 0 of 10/06/2016



## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.



# Datasheet

Bicycle Stands Pireo 5 seats

Product code 308

Rev. 0 of 10/06/2016



---

## DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

---

## FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality management system.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate of Processing Center