



Datasheet
Bicycle Stands Flat
Product code 358

Rev. 0 of 10/06/2016

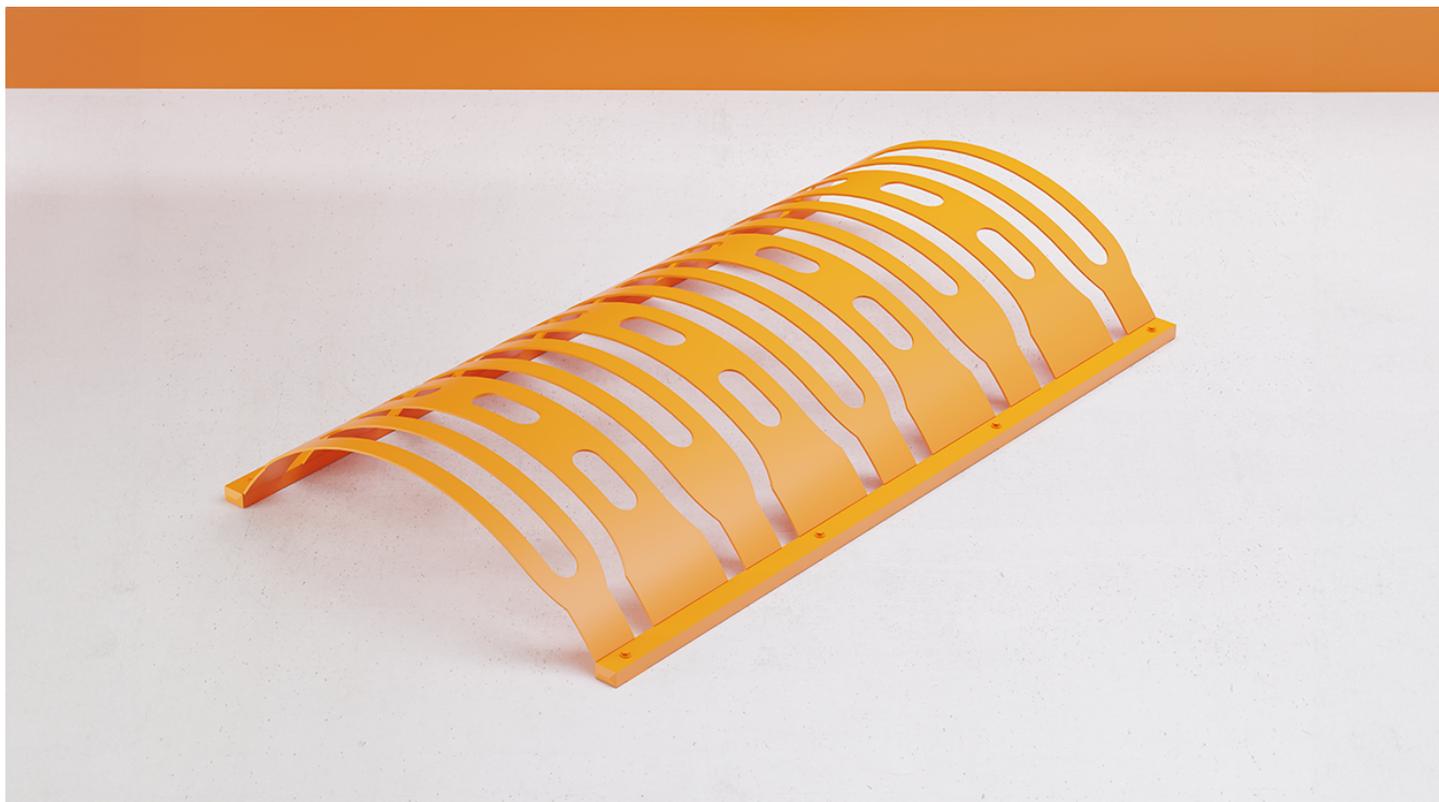

1/5

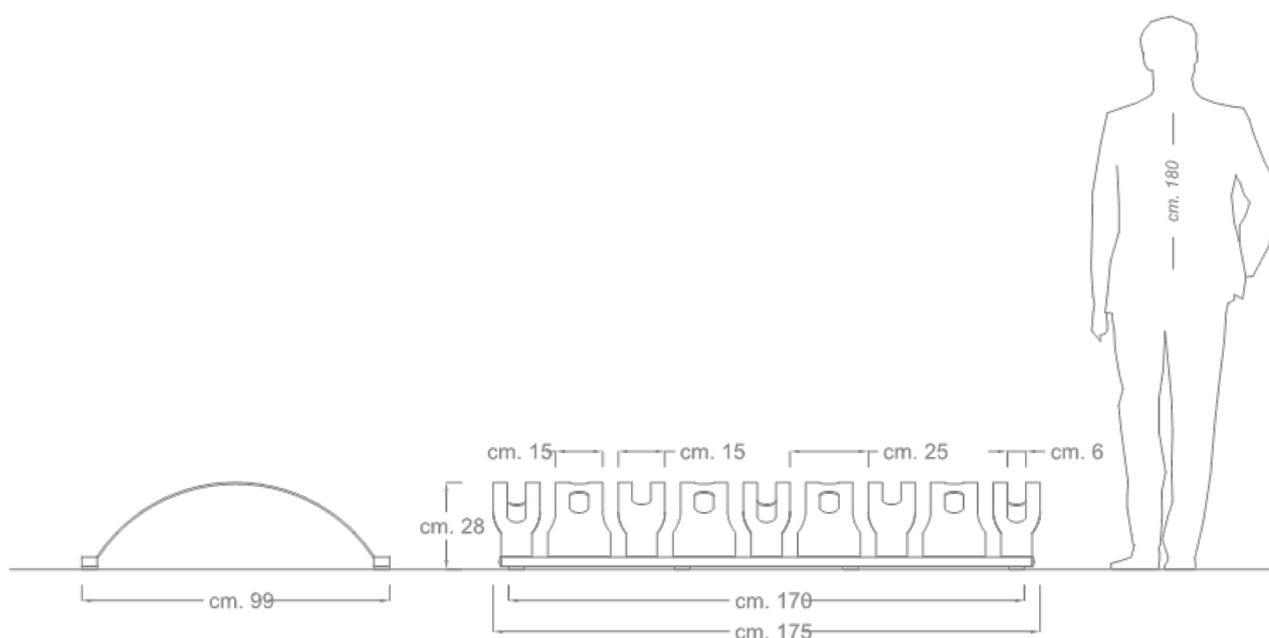

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

Flat bike rack for 5 places composed of 2 horizontal crosspieces in rectangular galvanized steel tube 50x30x2 mm complete with PVC end caps at the ends.

- The crosspieces are equipped with 8 feet that prevent direct contact of the structure with the ground.
- 5 arch-shaped bike-stop supports (welded to the two crosspieces) in 5 mm thick galvanized sheet metal characterized by a central hollowing that allows the wheel to be inserted and locked.
- N. 4 arch-shaped chain attachment supports (welded to the two crosspieces) in 5 mm thick galvanized sheet metal characterized by three stylised hollowing.

In order to allow practical and convenient use, the bike-stop supports and the chain attachment supports are arranged alternately with each other.

Total weight: 52Kg

Datasheet

Bicycle Stands Flat
Product code 358

Rev. 0 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 2000
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center