




1/5

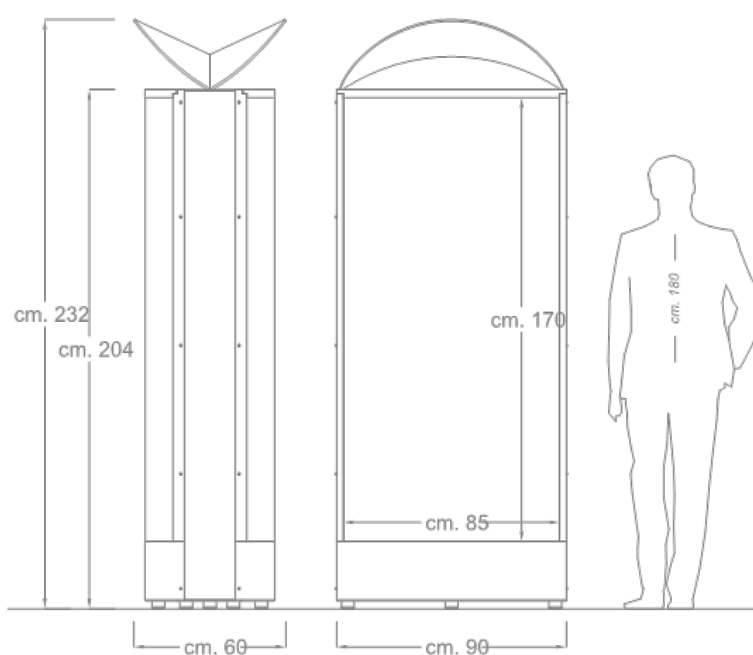

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

---

## DESCRIPTION

### Structure

Totem Display composed of an internal frame made of rectangular galvanized steel tube mm. 30x10x1.5; sides made of galvanized steel sheet thickness mm. 3; calendered and laser-cut shaped hat in galvanized sheet thickness mm. 4.

- Posting surface obtained from panels made of galvanized sheet thickness mm. 1.2.
- Reading sides made of compact transparent polycarbonate, unbreakable, protected from UV rays and particularly suitable for outdoor use, thickness mm. 3.
- The display of advertising media is made possible by removing the glass holders that block the sheet of transparent compact polycarbonate.
- Base in galvanized sheet thickness mm. 3 with holes for possible fixing to the ground; the base is equipped with feet that prevent direct contact of the structure with the ground.

**Overall weight:** 110Kg

---

**COLOR FINISH AS PROVIDED IN THE CATALOG**



Brilliant aluminum  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

---

**PRODUCT OPTIONALS**

Product code 365-AD -

---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

---

## DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

---

## FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality management system.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate of Processing Center