


1/5

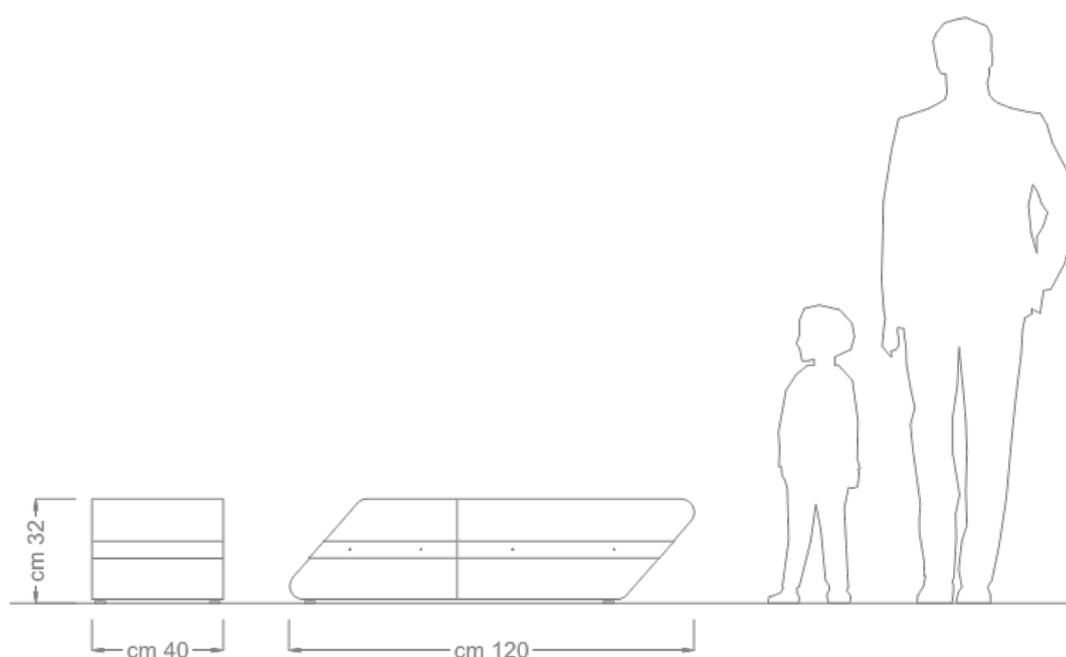

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

# Datasheet

Gommina the seat  
Product code D870

Rev. 0 of 07/02/2023



---

## DESCRIPTION

### Structure

Color and creativity come together to create a one-of-a-kind seat, the Gommina bench was born as a new form of furniture designed for use by children. Bright colors, all child-friendly. The Gommina bench is made of boxes made of 2 mm thick galvanized steel sheet, shaped and obtained by cutting with laser technology. The supports are subsequently assembled to form a single block with the characteristic "rubber" shape. The appearance is most distinguished by the central horizontal band, made of galvanized and shaped sheet metal.

The Gommina bench is equipped with a frame at the base for possible fixing to the ground.

**Overall weight:** 37Kg

# Datasheet

Gommina the seat  
Product code D870

Rev. 0 of 07/02/2023



---

## COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 5017  
( Boxed )



RAL 3003  
( Boxed )



RAL 9016  
( Central band )

Customers can request a different finish from the RAL color options available on our website.

# Datasheet

Gommina the seat  
Product code D870

Rev. 0 of 07/02/2023



---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

---

**DELIVERY**

Product supplied already assembled with steel hardware and instructions for ground fixing.

---

**FIXING**

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

---

**CORPORATE CERTIFICATIONS**

**ISO 9001:2015**

Quality management system.

**UNI EN ISO 3834-3:2021**

Welding quality management system.

**Processing center**

Certificate of Processing Center