




1/5

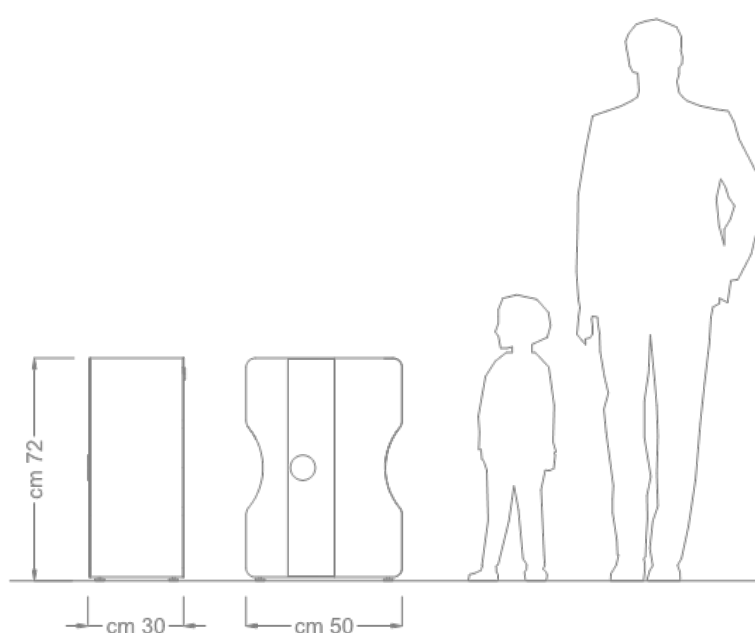

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

---

## DESCRIPTION

### Structure

Temperarifiuti model waste bin, a new form of furniture with an unmistakable style, designed for use by children. Playful lines and bright colors, all child-friendly. The waste bin is made of a single shaped box, with the characteristic "pencil sharpener" shape, made of 2 mm thick galvanized sheet metal, with front/back panels shaped with laser cutting technology, and side panels shaped by press-bending.

- Upper door with a circular hole, reminiscent of the insertion of the pencil, for the introduction of waste, made of 2 mm thick galvanized sheet metal.
- 2. Front metal profile, shaped in the shape of a "blade", made of 2 mm thick galvanized sheet metal.
- 2. The waste bin is equipped with a metal container inside for the insertion of any bag (not supplied).
- Base equipped with feet with plastic end caps, and internal bottom equipped with holes for fixing to the ground.

**Overall weight:** 31Kg

---

COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 2000  
( Basket )



Brilliant aluminum  
( Blade )

Customers can request a different finish from the RAL color options available on our website.

---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

---

## DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

---

## FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality management system.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate of Processing Center