

Datasheet


Flower box Flora tall

Product code G465

Rev. 0 of 28/02/2020



1/5

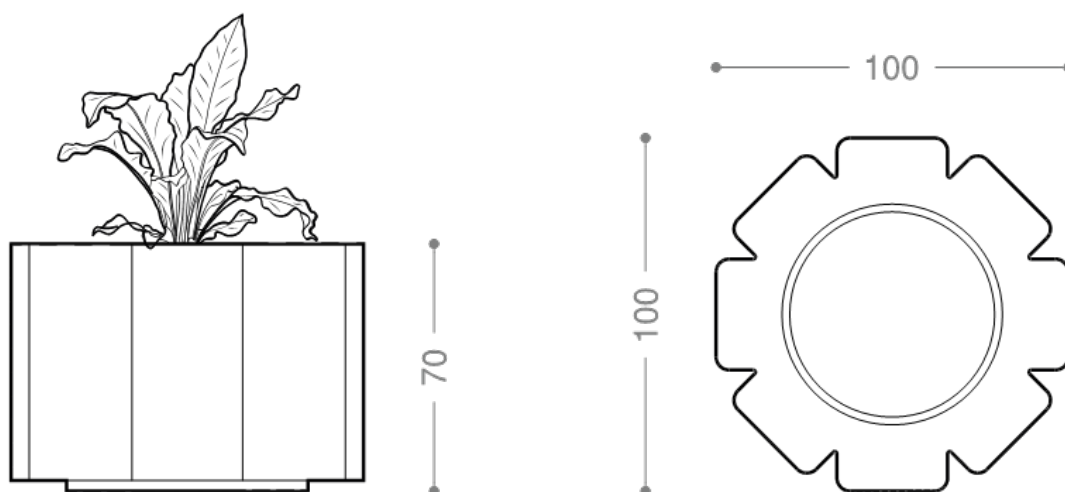

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Flower box Flora tall

Product code G465

Rev. 0 of 28/02/2020



DESCRIPTION

Structure

The Flora model flowerpot takes its name from its characteristic floral shape. Consisting of a single module, made of 2 mm thick galvanized steel sheet, it is characterized by a shaped upper panel, obtained by laser cutting in the shape of a stylised flower. In the centre it is equipped with a circular hole for the introduction of flowering plants.

- Inside the flowerpot is equipped with a cylindrical container that acts as a basin; the perimeter panelling is made using shaped galvanised sheets that give it its particular shape.
- At the base the flowerpot is equipped with a plinth in order to avoid direct contact with the flooring.

Overall weight: 99Kg

Datasheet

Flower box Flora tall

Product code G465

Rev. 0 of 28/02/2020



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 3015
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code G465-BIS - Flower box Flora lower](#)

Datasheet

Flower box Flora tall

Product code G465

Rev. 0 of 28/02/2020



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Flower box Flora tall

Product code G465

Rev. 0 of 28/02/2020



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product does not require anchoring to the ground.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008