

Dimens reserves the right to make at any time changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items

P.I. C.F. 031129830752

Stylus bench of cm. 150 Product code 1127-150

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Stylus bench composed of N. 2 shaped supports in galvanized flat iron mm. 40x8. Each single support is provided with a central reinforcement in galvanized flat iron mm. 40x8.

- Seat-backrest shell made with a total of N. 16 profiles in galvanized steel tube with oval section mm. 40x20x1.5 complete with PVC end caps.
- The profiles are welded on special galvanized flat iron shapes mm. 40x4 which give it the anatomical shape.

Peso complessivo: 54Kg

2/2



COLOR FINISH AS PROVIDED IN THE CATALOG



Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 1127-200 - Stylus bench of cm. 200

က

7,

Datasheet

Stylus bench of cm. 150 Product code 1127-150

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Stylus bench of cm. 150 Product code 1127-150

Rev. 0 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center


2



City Life

Design



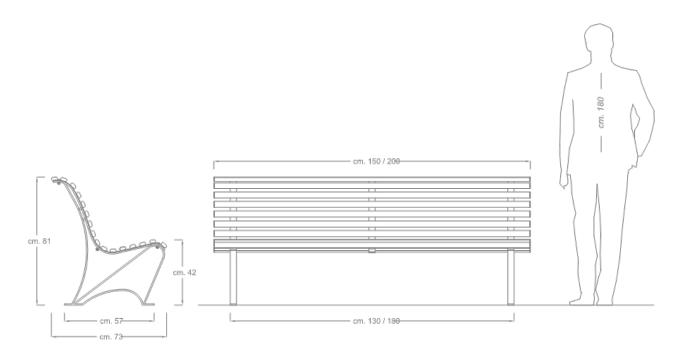

Stylus bench of cm. 200 Product code 1127-200

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Stylus bench composed of N. 2 shaped supports in galvanized flat iron mm. 40x8. Each single support is provided with a central reinforcement in galvanized flat iron mm. 40x8.

- Seat-backrest shell made with a total of N. 16 profiles in galvanized steel tube with oval section mm. 40x20x1.5 complete with PVC end caps.
- The profiles are welded on special galvanized flat iron shapes mm. 40x4 which give it the anatomical shape.

Peso complessivo: 63Kg

2/2



COLOR FINISH AS PROVIDED IN THE CATALOG



Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 1127-150 - Stylus bench of cm. 150

<u></u>

<u>ر</u>

Datasheet

Stylus bench of cm. 200 Product code 1127-200

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Stylus bench of cm. 200 Product code 1127-200

Rev. 0 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center

2/2