


Datasheet

Clematis Grand Bouquet

Product code 298-GB

Rev. 1 of 20/03/2019

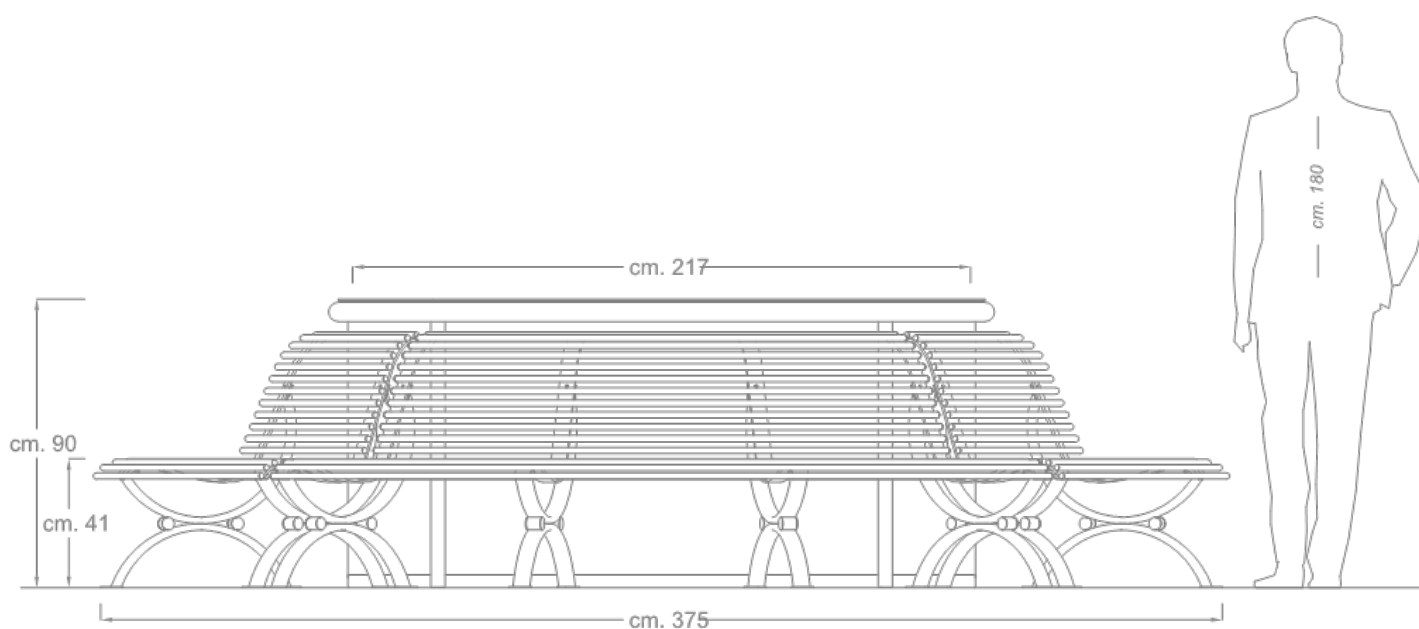

5/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DESCRIPTION

Structure

Cylindrical in shape, consisting of an upper ring in galvanized steel round tube Ø mm. 60 x 2. Perimeter shaft made of galvanized sheet metal thickness mm. 1.5 with alternating circular holes; the shaft is made solid by vertical supports in galvanized steel profile.

- Internal tank made of light "grey" colored fiberglass positioned on special base profiles made of galvanized steel profile.
- The Clematis Grand Bouquet planter is characterized by the composition of 4 Clematis model benches with convex side seat.
- Each bench is made up of N. 04 opposing arched supports, made of galvanized rectangular tube mm. 50 x 20 x 3 adorned with galvanized rounds; seat-backrest made with N. 25 curved profiles in galvanized steel round tube Ø mm. 20 x 1.5 complete with PVC end caps with spherical head.
- The profiles are welded onto special 50 x 8 mm galvanized flat iron shapes, which give them their anatomical shape.

Overall weight: 513Kg

Datasheet

Clematis Grand Bouquet

Product code 298-GB

Rev. 1 of 20/03/2019



FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

Datasheet

Clematis Grand Bouquet

Product code 298-GB

Rev. 1 of 20/03/2019



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018