
Rev. 2 of 25/07/2016







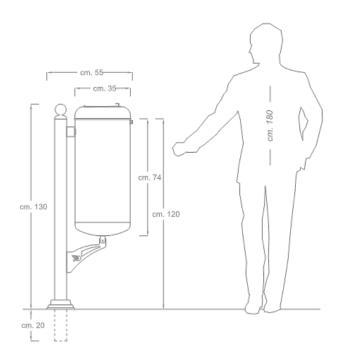

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

75

Datasheet

Ecocity trash collection for medicines Product code 412-F

Rev. 2 of 25/07/2016



DESCRIPTION

Structure

The Ecocity bin is made up of a support upright in round tubular galvanized steel measuring 76x2 mm, adorned at the top with a decorative frieze and at the bottom with a galvanized steel flange that serves to cover the hole made for burial.

- Basket support arm obtained from high definition plasma cutting with decorative carvings, and made of galvanized sheet metal, thickness 8 mm.
- Cylindrical container made of galvanized sheet metal, thickness 1.5 mm.
- The drum is made up, at the bottom, of a shaped bottom in galvanized sheet metal, thickness 3 mm and a lid, at the top, with a plate indicating the type of collection in galvanized sheet metal, thickness 1.2 mm; a hinge connects the lid to the drum, while a universal key lock allows the lid to be opened and the container to be extracted (see detail). Internal container in PVC intended for waste collection and plate indicating the type of collection.

Overall weight: 22Kg

വ

Ecocity trash collection for medicines Product code 412-F


Rev. 2 of 25/07/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 9016 (Lid)



Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS



Product code 431 - Ashtray Bond

PRODUCT VARIANTS



Product code 412-P - Ecocity basket for collecting waste batteries



Product code 412-TF - Ecocity for trash collection TF

വ

7/5

Datasheet

Ecocity trash collection for medicines Product code 412-F

Rev. 2 of 25/07/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the article

Datasheet

Ecocity trash collection for medicines Product code 412-F

Rev. 2 of 25/07/2016



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018

2