

Datasheet


Formaggino litter bin

Product code G560

Rev. 0 of 07/08/2020



1/5

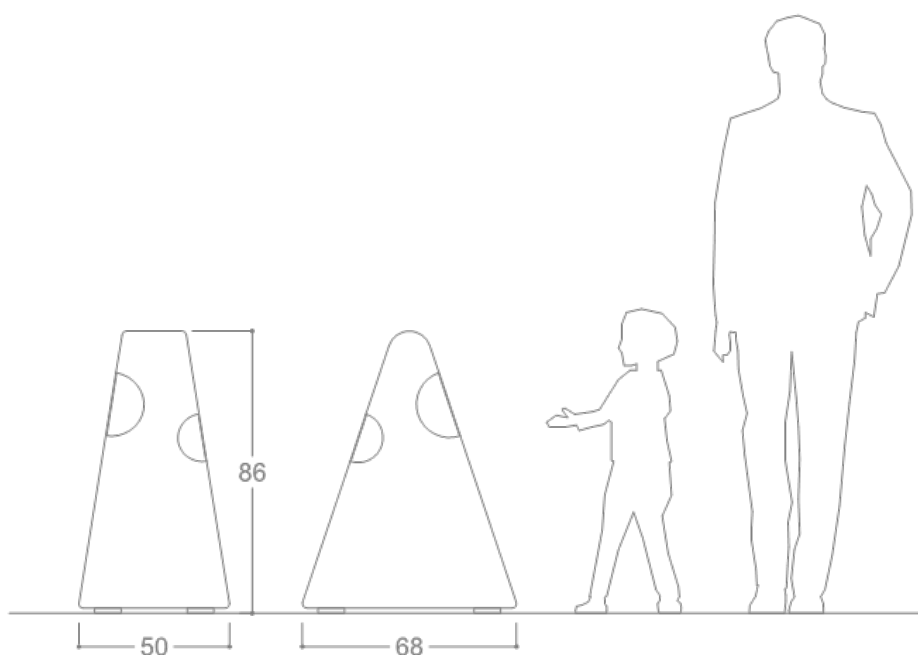

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION

Structure

The Formaggino basket was born as a new form of furniture designed for use by children, with playful and unique lines, designed to be child-sized. The basket is made of a shaped shaft, made of 2 mm thick galvanized steel sheet and an internal frame in Ø 25x1.5 mm galvanized steel round tube.

- The base is equipped with holes for fixing to the ground; furthermore, the structure is raised from the ground by means of galvanized steel profile supports, in order to avoid contact with the entire bottom surface and allow rainwater to drain away.
- The external body is characterized by stylised carvings, obtained by cutting with laser technology, which reproduce the "typical" holes of cheese.
- In addition to aesthetics, the holes were designed for the introduction of waste.

Overall weight: 34Kg

Datasheet

Formaggino litter bin

Product code G560

Rev. 0 of 07/08/2020



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1018
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

Datasheet

Formaggino litter bin

Product code G560

Rev. 0 of 07/08/2020



DELIVERY

The product comes with steel screws and fixing instructions.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018