
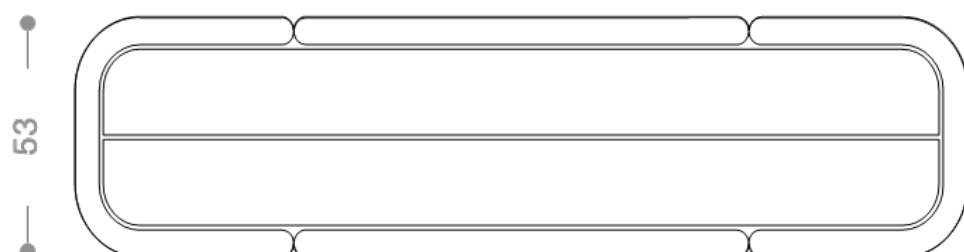


## Product code 603-OK

 City  
Life  
Design  
**DIMCAR**

**dimcar.it**



1/5

P.I. C.F. 031129830752  
REA LE 200574 CAP SOC. SOC. € 2.000.000.00

DESCRIPTION

Structure

Hello! Hello! is the first thing we say when we meet someone. Using it with anyone and not just with friends or colleagues is the simplest form of greeting; yet, the most meaningful, it transmits welcome, friendship and enthusiasm even among strangers. The Hello bench was born with the intent of creating a product that is equally simple, versatile and at the same time communicative. Soft lines and a generous seat define a design that is as elegant and welcoming as it is easy-going, suitable for both outdoor public spaces and indoor environments.

Structure made entirely of round profile of galvanized steel Ø 60x2 mm.

Seat composed of two shaped slats in Okumè wood, section mm. 190x40.

The same article can be requested with slats in Nordic Pine.

**Total weight:** 26Kg

# Datasheet

Hello seat with Okumè wooden planks

Product code 603-OK

Rev. 0 of 04/07/2024



## FINISH ACCORDING TO THE CATALOGUE



RAL 7032  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

MAINTENANCE PLAN FOR WOODEN PARTS

For a long service life of wood planks, periodic maintenance work is necessary, therefore, maintenance is recommended **every three to six months and in any case once a year**.

For periodic maintenance, carry out light sanding with a 150-grit abrasive sponge, apply a thin coat of Adler Oil, absolutely avoiding the formation of layers.

For the renewal of aged and graying elements, proceed with a thorough sanding with a 150-grit abrasive sponge in the direction of the fibers, removing any existing paint residue.

Proceed with an initial application of Adler Light Mahogany Oil by brush. After 12 hours, apply a second coat of Olio Adler light mahogany with a brush and then pull off excess product with a soft cloth.

Please note, necessary maintenance products such as Oils and impregnants are not included in the product supply but can be requested separately.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles



DELIVERY

The product comes with steel screws and fixing instructions.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018





# Datasheet

Hello seat with Nordic pine wooden planks

Product code 603-PI

Rev. 0 of 04/07/2024

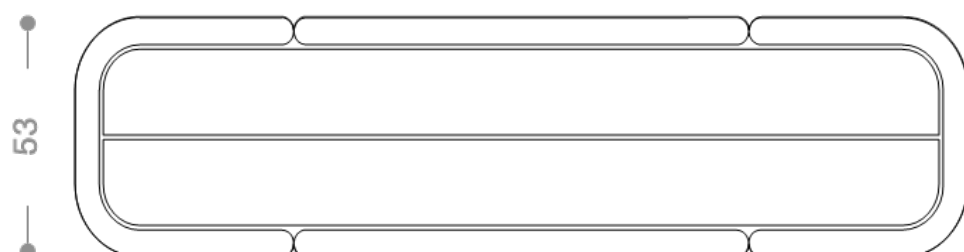

1/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION

Structure

Hello! Hello! is the first thing we say when we meet someone. Using it with anyone and not just with friends or colleagues is the simplest form of greeting; yet, the most meaningful, it transmits welcome, friendship and enthusiasm even among strangers. The Hello bench was born with the intent of creating a product that is equally simple, versatile and at the same time communicative. Soft lines and a generous seat define a design that is as elegant and welcoming as it is easy-going, suitable for both outdoor public spaces and indoor environments.

Structure made entirely of round profile of galvanized steel Ø 60x2 mm.

Seat composed of two shaped slats in Nordic Pine wood, section mm. 190x40.

The same article can be requested with slats in Okumé.

**Total weight:** 26Kg

# Datasheet

Hello seat with Nordic pine wooden planks

Product code 603-PI

Rev. 0 of 04/07/2024



## FINISH ACCORDING TO THE CATALOGUE



RAL 7032  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.



# Datasheet

Hello seat with Nordic pine wooden planks

Product code 603-PI

Rev. 0 of 04/07/2024



## TREATMENTS AND FINISHES THAT PREVENT CORROSION

### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

### Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

## MAINTENANCE PLAN FOR WOODEN PARTS

For a long service life of wood planks, periodic maintenance work is necessary, therefore, **maintenance** is recommended **every three to six months and in any case once a year**.

For periodic maintenance, carry out light sanding with a 150-grit abrasive sponge, apply a thin coat of Adler Oil, absolutely avoiding the formation of layers.

For renewal of aged and graying elements, proceed with a thorough sanding with a 150-grit abrasive sponge in the direction of the fibers, removing any residue of existing paint.

Proceed with an initial brush application of water-based Adler Teak impregnating agent. After 12 hours, apply a second coat of clear Adler Teak Oil by brush and then pull off excess product with a soft cloth.

Please note, necessary maintenance products such as Oils and impregnants are not included in the product supply but can be requested separately.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles



DELIVERY

The product comes with steel screws and fixing instructions.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018