
Rev. 0 of 12/07/2022







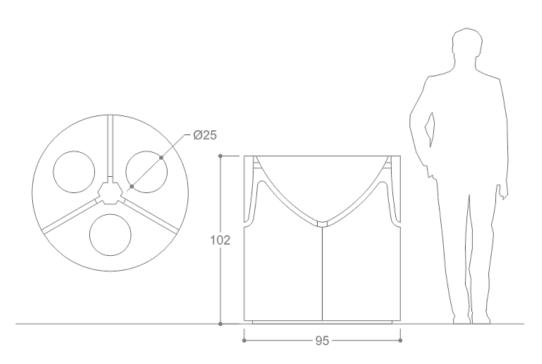

Dimension has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles.

7

Datasheet

Kurt large trash bin with 3 compartments Product code G492

Rev. 0 of 12/07/2022



DESCRIPTION

structure

The Kurt litter bin stands out for its original shapes, it is made up of a cylindrical shaped shaft, with a particular shape in the upper part, made of 2 mm thick galvanized sheet metal, and obtained by cutting with laser technology. Internal structure consisting of a base with provision for fixing to the ground, made of 3 mm thick galvanized sheet metal, and galvanized steel profiles to support the upper covers.

No. 3 upper shaped sections that can be opened, hinged in the upper part, made of 2 mm thick galvanized sheet metal, and obtained by cutting with laser technology, equipped with a shaped front casing and an upper hole for introducing waste.

- Each compartment is equipped with a cylindrical shaped container inside, made of galvanized sheet metal and equipped with an anti-cut upper edge, for waste collection (bag not supplied).
- On the front each section is equipped with an indication of the type of collection.

Overall weight: 87Kg

വ

Kurt large trash bin with 3 compartments Product code G492

Rev. 0 of 12/07/2022



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 5015 (Lid)



RAL 9016 (Basket)



RAL 3020 (Lid)



RAL 1018 (Lid)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS



Product code 431 - Ashtray Bond

PRODUCT VARIANTS



Product code G493 - Kurt large trash bin



Product code G493-BIS - Kurt Four recycling bin with lid



Product code G492-BIS - Kurt Three recycling bin with lid

4 آ

Datasheet

Kurt large trash bin with 3 compartments Product code G492

Rev. 0 of 12/07/2022



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Kurt large trash bin with 3 compartments Product code G492

Rev. 0 of 12/07/2022



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008