

Datasheet


Miss Thin litter bin with lid

Product code G469-BIS

Rev. 0 of 26/05/2020



1/5

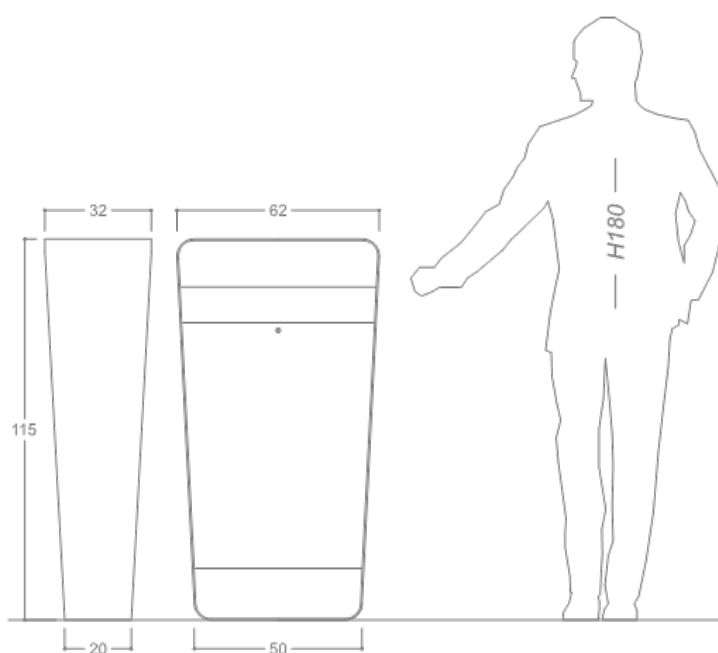

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Miss Thin litter bin with lid

Product code G469-BIS

Rev. 0 of 26/05/2020



DESCRIPTION

Structure

With its particular flared shape, the Miss Thin bin with lid is made up of an external support, made of 5 mm thick galvanized sheet metal, specially shaped to reproduce the upper lid, and a lower base with holes for fixing to the floor.

- Trapezoidal-shaped frame, made of 2 mm thick galvanized sheet metal; made up of an upper panel with a hole for inserting waste, a front door with a lock and a flap opening with a system that blocks its total opening.
- The door is equipped with a fixed bag-holder ring inside (bag not supplied).

Overall weight: 55Kg

Datasheet

Miss Thin litter bin with lid

Product code G469-BIS


Rev. 0 of 26/05/2020



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1018
(Basket)



RAL 7005
(Support and ring)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS



Product code 431 - Ashtray Bond

PRODUCT VARIANTS



Product code G469 - Miss Thin bin

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Miss Thin litter bin with lid

Product code G469-BIS

Rev. 0 of 26/05/2020



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Miss Thin litter bin with lid

Product code G469-BIS

Rev. 0 of 26/05/2020



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008