




1/5

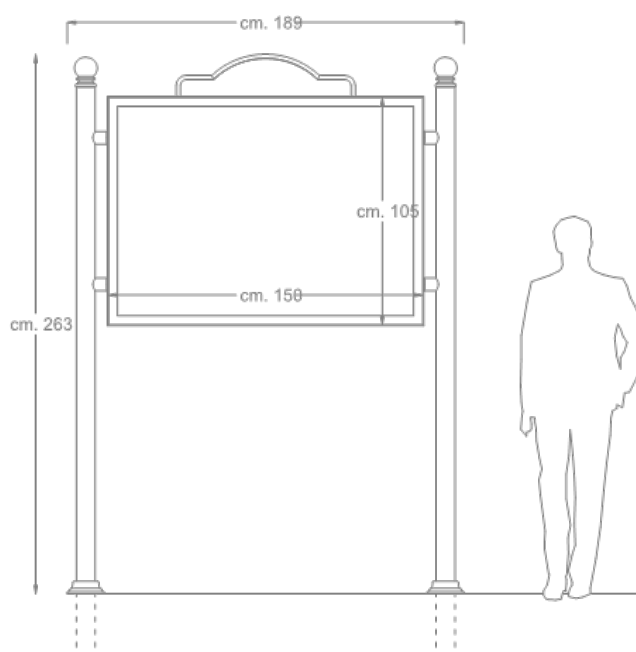

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION

Structure

Noticeboard made of 1.5 mm thick galvanized steel box complete with drip tray in the upper part; opening front door made of galvanized steel profiles and equipped with key lock (unique encryption).

- Door infill made of 3 mm thick transparent compact polycarbonate, shatterproof, protected from UV rays and particularly suitable for outdoor use; the posting is done using magnets.
- Side uprights made of Ø 89x2 mm galvanized steel round tube, adorned in the upper part with decorative friezes; both are equipped with a decorative flange to cover the holes made for burial.
- Upper plate (removable) for the application of any name of the Municipality (adhesive not supplied).

Total weight: 69Kg

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



COLOR FINISH AS PROVIDED IN THE CATALOG



Gun metal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 192-AD -

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008